





FILE NO:ZS2810

**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature: -40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)



Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

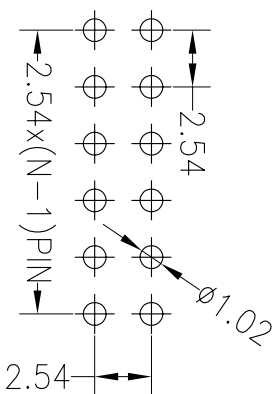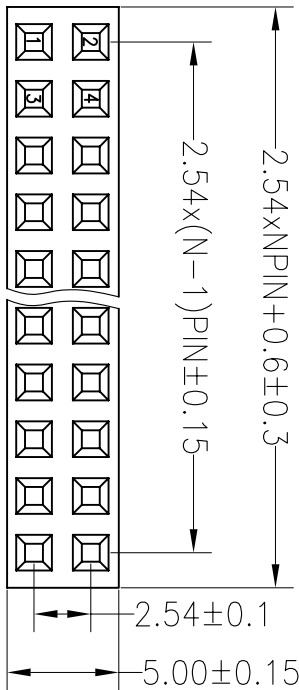

**Ordering Information**

2250 02 XX X N XX S U X 0X

- No. of Pins Per Row: 2\*40
- Insulator Material Option: A=BK-PBT, B=BK-PA6T, C=BK-PA6T, D=BK-PA46, F=BK-LOP
- Contact Plating: G1:Gold Flash, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, SO:Gold Flash/Tin, SN:Tin
- Packing: O=PE Bag, A=Troy, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar, SN:Tin

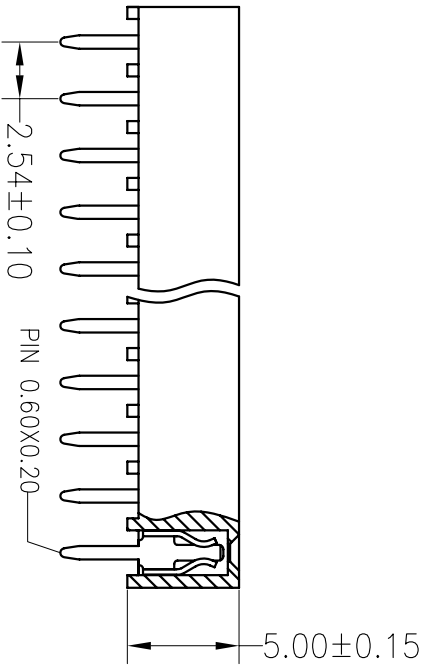

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YYS/USheng	12.03.28	SCALE		FIT	PROJ.
				X.X	±0.30				UNIT	mm		
A0	2012.03.28	NEW DRAWING		X.XX	±0.20	CHECK			SIZE	A4	SHEET	1/1
				Angle	±3°				SHEET	1/1		
				APPROVE								
				TITLE:		PART NO.		225002XXXXXSUX0X				
				TITLE:		PART NO.		2.54PF H5.0mm 2xNpin 180°				

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992