

SPECIFICATIONS





Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

Ordering Information

5440 XX B XX B 01

No. of Pins 10~80P
 Contact Plating SN:Tin
 G0:Gold Flash
 G2:5U"Gold
 G3:10U"Gold
 G4:15U"Gold
 G5:30U"Gold
 S0:Gold Flash/Ni
 Color Type B=Black

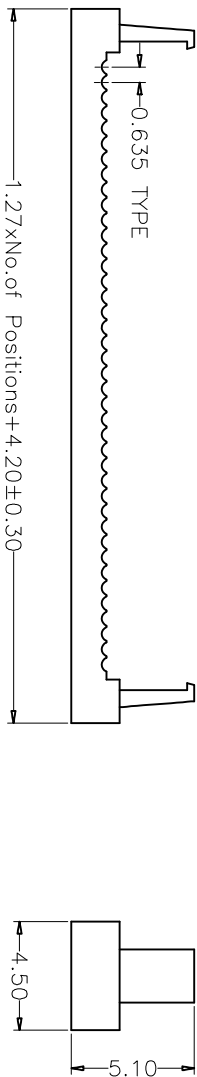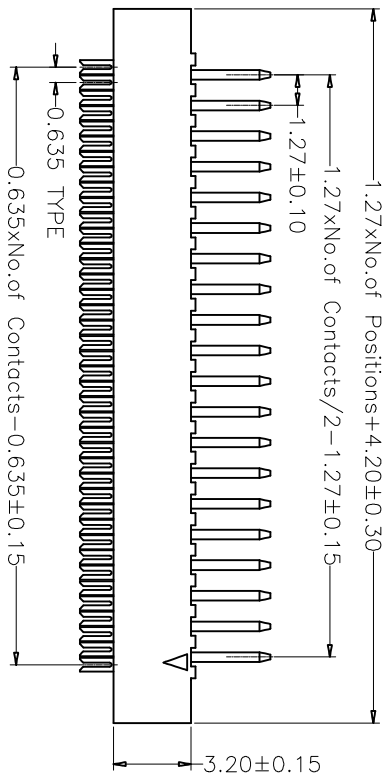

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

PART NO. 5440XXBXXB01

TITLE: 1.27x2.54 DIP NPin two type

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	YYuSheng	19.01.15	UNIT	mm	SIZE	A4	5440XXBXXB01	
X.XX	±0.20	CHECK		SHEET	1/1	1.27x2.54 DIP NPin two type			
X.XXX	±0.10	APPROVE		PROJ.					
Angle	±3°								
DIM	TOL								
REV	DATE	MODIFICATION DESCRIPTION	CHANGE						
A0	2019.01.15	NEW DRAWING							
1									