
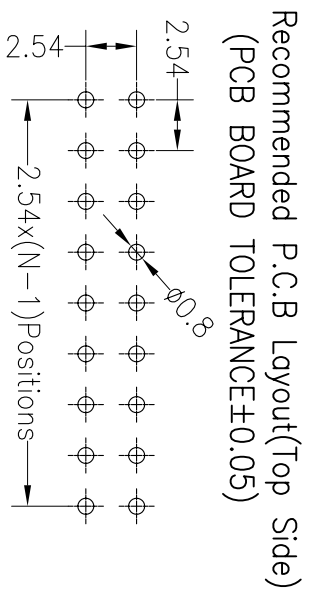


SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C



Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

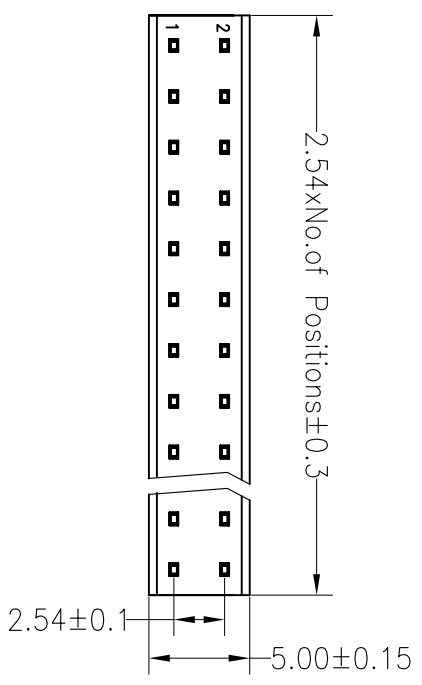

Ordering Information

2235 02 XX X N XX S Y X 01

- No. of Pins Per Row: 2*1~2*40
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Contact Plating: G0:Gold Flash, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold
- Packing: 0=Pe Bog, A=Troy, I=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar
- SN:Tin

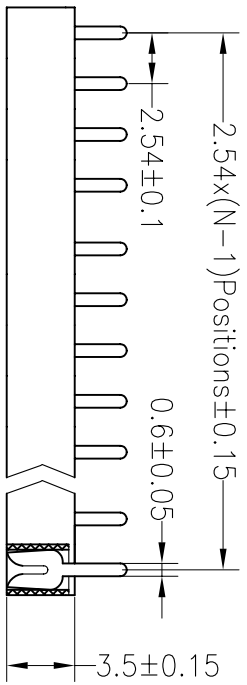

OPERATION		DRAW		YTYuSheng		12.03.28		SCALE		FIT		深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
X.X	±0.30							UNIT	mm				
X.XX	±0.20	CHECK						SIZE	A4	PART NO.		223502XXXXXXSYX01	
X.XXX	±0.10							SHEET	1/1	TITLE:		2.54PF H3.50mm 2xNpin 180°	
Angle	±3°	APPROVE						PROJ.		REV			
DIM	TOL	CHANGE								DATE		2012.03.28	
		MODIFICATION DESCRIPTION								NEW DRAWING			