

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA46





Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

3216 XX S XX X B K00 X 01

No.of Pins 8-64	Contact Plating G0:Gold Flash G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold S0:Gold Flash/Tin SN:Tin	Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 E=BK-PA9T F=BK-LCP	Packing 0=PE Bag A=Troy T=Tube P=Tube+Cap
--------------------	--	--	---

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

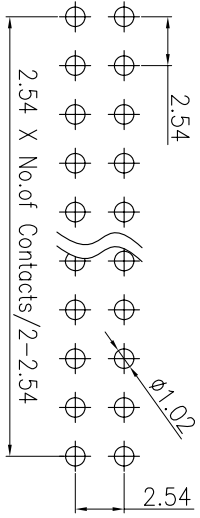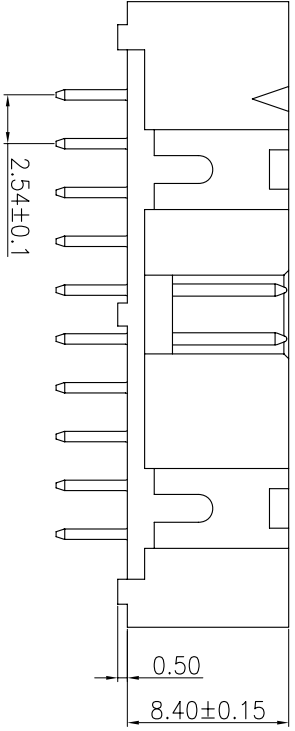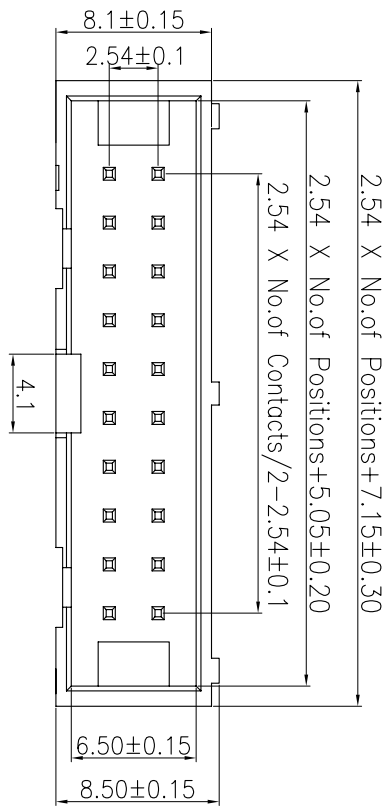

OPERATION		DRAW		SCALE		FIT	
X.X	±0.30	OuyangHui	16.08.23	UNIT	mm	SIZE	A4
X.XX	±0.20	CHECK		SHEET	1/1	PART NO.	3216XXSXXBKK00X01
X.XXX	±0.10	APPROVE		PROJ.		TITLE:	2.54DC3-NPIN H8.4 180°
Angle	±3'						
DIM	TOL						

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806 /5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A	2016.08.23	NEW DRAWING	