


HSF RoHS

SPECIFICATIONS PERFORMANCE

Electical Rating: AC/DC 50V 0.5A
 Contact Resistance: 80mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstand Volt: 500V AC/minute
 Opratng Temperature: -40°C to +105°C

Material

Contact: Phosphor Bronze Gold-Plated
 Housing: LCP UL94V0
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

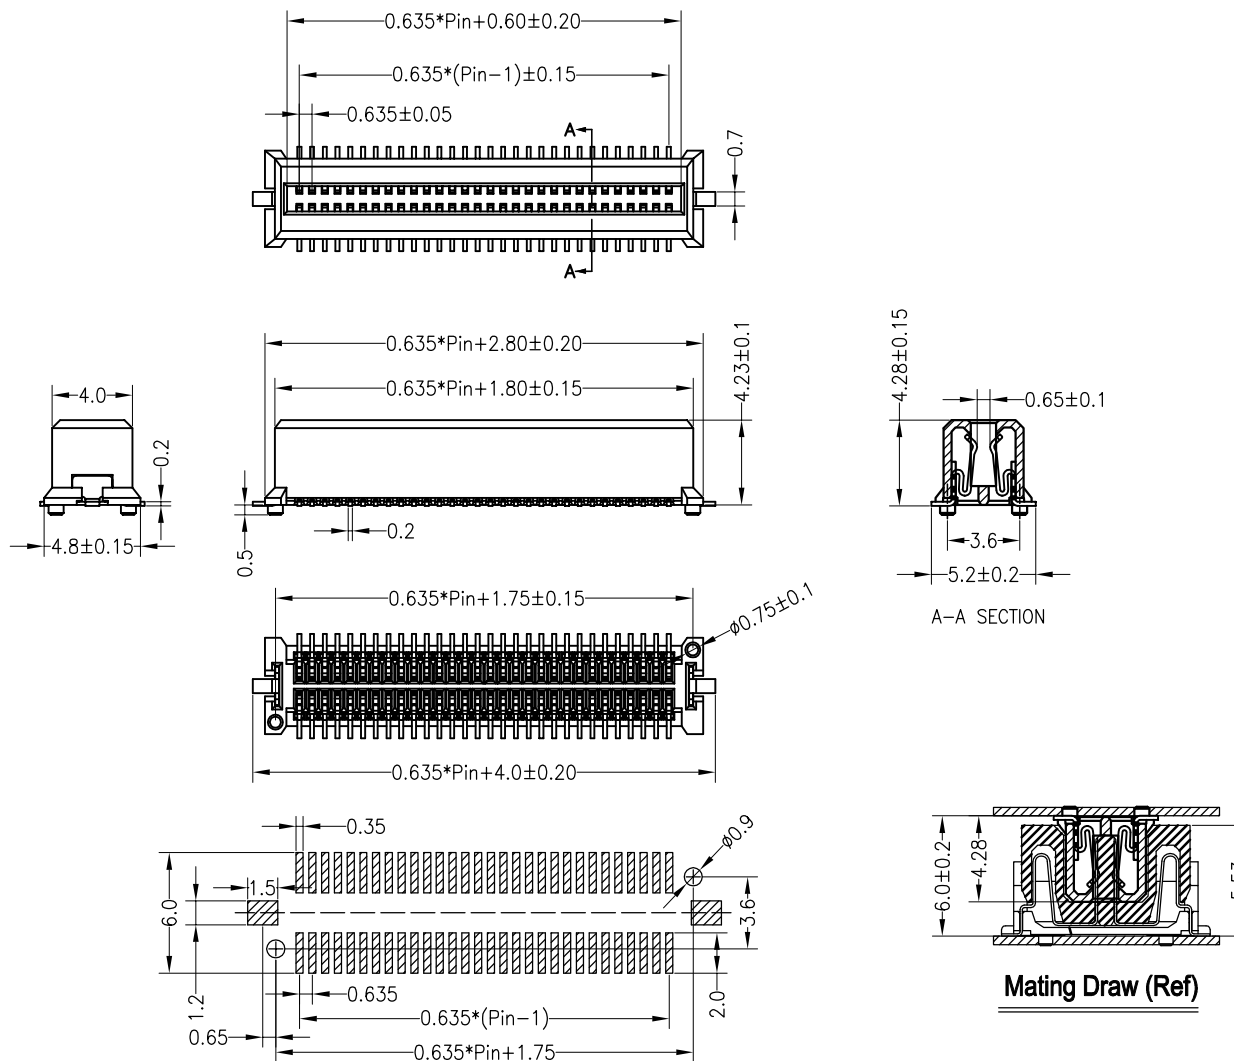

Ordering Information

3724 M XXX 043 XX F X 01

F=Female
 M=Male
 No.of pins
 20P~100P
 Plastic Hight
 043=4.28mm
 Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 S0:1.5U" Gold/Tin
 S1:3U" Gold/Tin
 Insulator
 Material
 Option
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
 Packing
 T:Tube
 R:Reel

P.C.B Layout

				OPERATION		DRAW	yiyusheng	20.09.03	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.		3724MXXX043XXFX01
				X.XXX	±0.10					APPROVE		SHEET
A0	2020.09.03	NEW DRAWING		Angle	±3°	PROJ.		TITLE				
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							
1	2	3	4	5	6	7	8	9				